
▲ AaronBradley_™

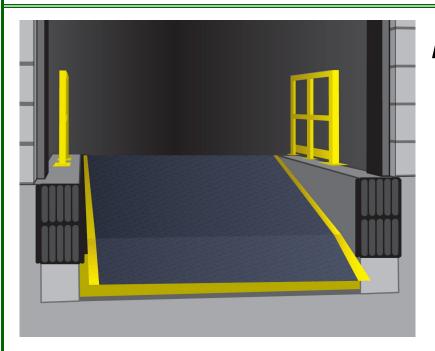

DockMaster™

Hydraulic Dock Leveler and Scissor Lift

The *DockMaster™* combines a dock leveler and scissor lift into one unit. This specialized product from Aaron-Bradley™ allows for both functions in one dock position. This eliminates the cost and space requirements of a dedicated dock position for a ramp, when dock to ground forklift access is required.

Features

- Hydraulic Dock Leveler: Designed for shipping and receiving, the DockMaster™ provides a service range of up to +/- 20" from dock height
- Hydraulic Scissor Lift: Allows the servicing of special truck heights above & below dock, and dock to ground access for forklift or materials. Service range of 0" (flush with grade) to a maximum of 72" above grade
- Includes solid state controls with PLC management and LED message indicators for all modes and functions
- Communication Light Package with Red/Green LED Lights & Driver Warning Signs
- The most versatile unit at any single dock opening
- Fully Hydraulic and ergonomic design does not require manual lifting or bending
- Designed for the most demanding applications requiring superior structural integrity, lasting dependability and operational functionality

Specializing in Dock Equipment & Scissor Tables



Standard Specifications

- Sizes From: 6' 6" W (minimum) x 8' 0" L to 8' 0" W x 12' 0" L
- Full Deck Surface Length: 8' = 96"; 10' = 120"; 12' = 144"
- Capacity, Scissor Lift (lbs.): 16,000 to 40,000
- Capacity, Dock Leveler (lbs.): 35,000 to 60,000
- Full Hydraulic Operation
- Main Power-pack: Fully enclosed, regenerative system, 208v-480v/3ph/5hp/60Hz
- Lip & Rear Hinge Hydraulics: 230-460v/3ph/1hp/60Hz
- Control: Standard Push-button with NEMA 12 enclosure. Includes controls for Scissor Lift, Dock Leveler operations and Communication Lights
- Communication Light Package: Includes inside/outside LED Red/Green Lights and Mirrored Driver Warning Signs
- Service Range, 8' L Unit: <u>Lift</u> up to 58" above grade; <u>Leveler</u> 12" above / 20" below dock
- Service Range, 10' L Unit: <u>Lift</u> up to 60" above grade; <u>Leveler</u> 12" above / 20" below dock
- Service Range, 12' L Unit: <u>Lift</u> up to 72" above grade; <u>Leveler</u> 20" above / 20" below dock
- Lip: Standard 20" L, provides 11" reach (lip purchase) past 4.5" bumpers
- Front Roller Curtain: Encloses front of pit during all operations
- Laminated, Vertical Dock Bumpers, 4.5" Deep x 20" Long x 11" Wide
- Easy maintenance access without auxiliary equipment
- Finish: Industrial Gray Enamel w/ Safety Yellow Side Striping
- Visual Flashing Beacon: Activates during scissor lift function only, in below dock mode

Options

- Custom designed sizes and capacities: Call for details
- Application Engineering assistance and Consultation
- Combination Control Panel: Provides operation of DockMaster™ with an overhead door, dock light or fan/heater. Can also be equipped with an auxiliary power outlet
- Finish: Custom Paint (requires mfg and paint number); Spray Metalized (Cold-spray Galvanizing)
- Hand-rails, OSHA requirement (Optional purchase from ABC Docks or by others)
- Lip Length Up to 32" reach (lip purchase)
- Audible Alarm w/ Key Override: Provides alarm for up/down travel for Scissor Lift function only
- Vertical Laminated Bumpers: 24" or 36" Long, with or without Steel Face Plates

ABC DOCKS, LLC
P.O. Box 1028
Franklin, TN 37065-1028
Ph) 800-394-5944 / 615-807-1141
Fax) 615-807-1752
Web: www.aaronbradley.com
Email: sales@abcdocks.com

Distributed By:

Specializing in Dock Equipment & Scissor Tables