

HIGH PERFORMANCE LINE

EXTREME[®] RUBBER DOORS

Models EPR-10 and EPR-20

EXTREME[™] PERFORMANCE RUBBER DOOR PRODUCT SELECTION CHARTS

		MODEL EPR-10 HIGH PERFORMANCE				MODEL EPR-20 SPRINGLESS
SIZE LIMITS		20'W x 20'H	20'W x 20'H	30'W x 30'H	47'W x 45'H	25'W x 30'H
OPERATION	Manual Operation	x				
	Motor Operation		x	x	x	x
OPENING SPEED¹	Measured in inches per second		15 - 60"	16 - 20"	10 - 12"	16 - 30"
CYCLE RATING (,000)	Counter-balance spring assembly Springless EPR-20	50	100	50	50	unlimited, warrantied 2 yrs
	200,000 cycle springs option ²	x	x	x	x	
SPRINGLESS DESIGN	Direct connect inertia brake mounted on the drive barrel shaft					x
HEADROOM CLEARANCE		25"	30"	33"	53"	<= 10'H - 18" <= 15'H - 25" <= 30'H - 33"
OPERATORS	Standard gear head		15 - 30"/sec.	x	x	
	Gear head with inverter drive soft start, soft stop		40 - 60"/sec.			x
CONTROL PANELS	Relay logic		x	x	x	
	PLC (available with std. GH, included with inverter drive)		x	x	x	x
TYPE OF CURTAIN	¼" black SBR rubber with polyester core weave	x	x	x	x	x
REVERSING EDGE	Pressure-sensitive air wave edge. Also thru-beam photoelectric sensor.		x	x	x	x
ACTIVATION	Remotes, pull cords, loop detectors, etc.		x	x	x	x
IMPACTABILITY	NEWGEN [®] Guide and CurtainLok [™] System, knock-away bottom bar	x	x	x	> 35'W, 25'H consult factory	x
WARRANTY	Two years on parts and workmanship, limited lifetime on curtain and NEWGEN Guide	x	x	x	x	x


1 Speed will vary depending on door size. Refer to chart on reverse. Consult factory when product details are critical.

2 Availability of 200,000 cycle springs dependent on door size. Consult factory when product details are critical.


The dimensions featured on this sheet are provided as a guide.

HIGH PERFORMANCE LINE **EXTREME® RUBBER DOORS** Models EPR-10 and EPR-20

COUNTER-BALANCE SPRING ASSEMBLY MODEL EPR-10

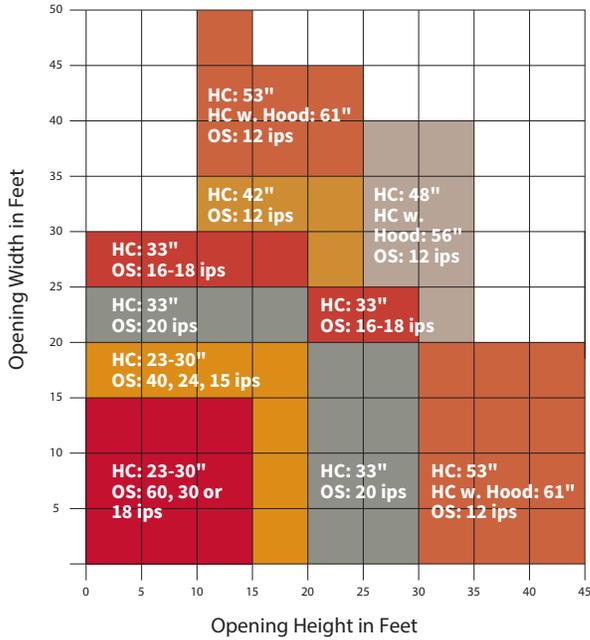


SPRINGLESS CYCLE DUTY DESIGN MODEL EPR-20

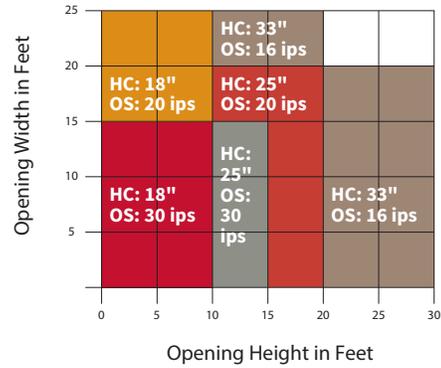


Dimensions in Inches

HC = Headroom Clearance
OS = Opening Speed
ips = inches per second

COUNTER-BALANCE SPRING ASSEMBLY

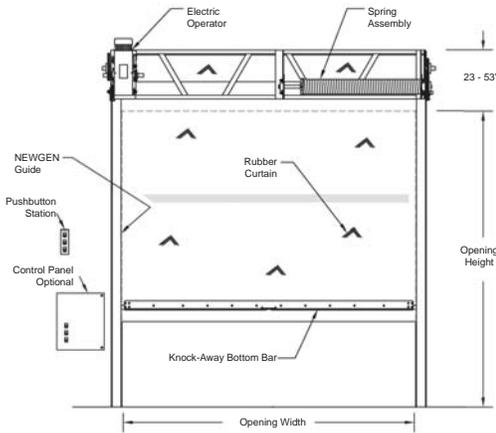

SPRINGLESS CYCLE DUTY DESIGN

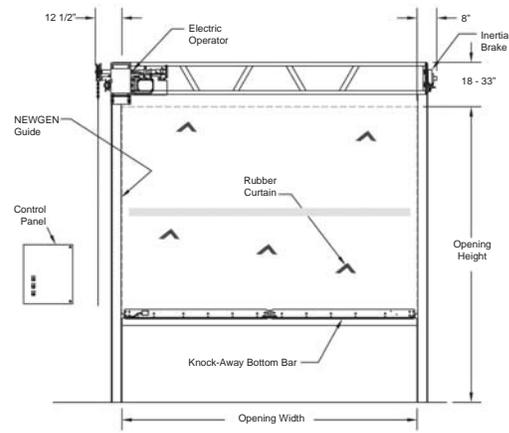

The dimensions featured on this sheet are provided as a guide. Please contact the factory for exact dimensions for your closure.

CUSTOM-DESIGNED SOLUTIONS

Our experienced Architectural Design Support Team can customize our products to fit your specific application. Call 800.233.8366 ext. 4551 • ads@cornelliron.com