

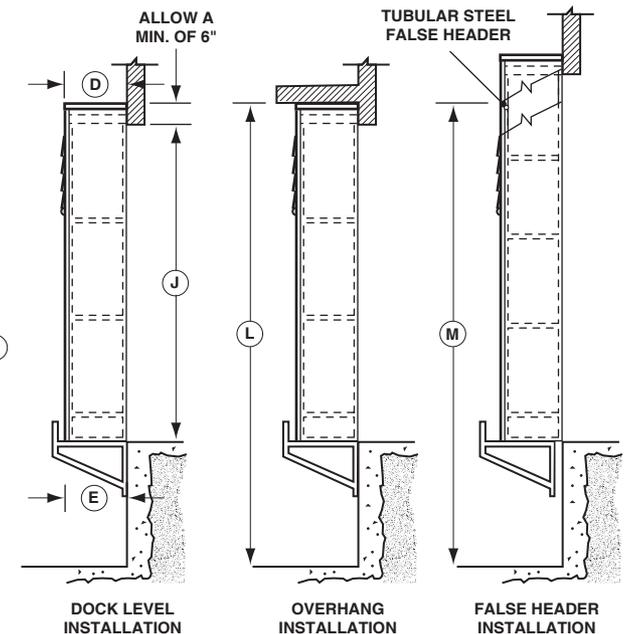
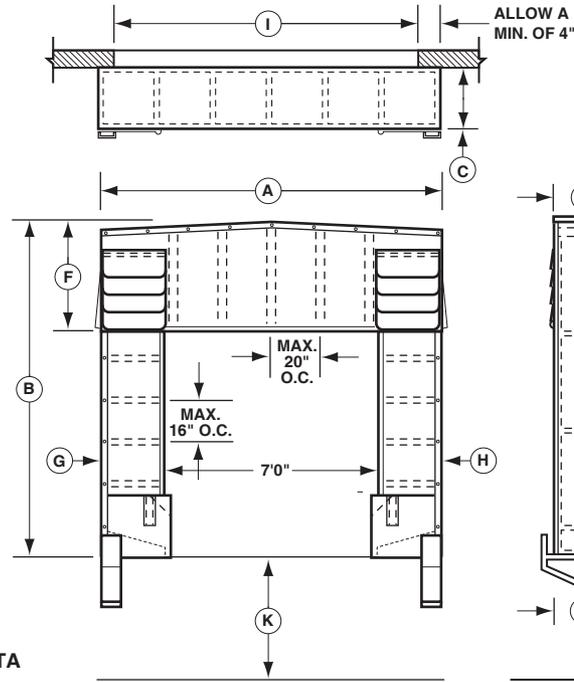



SERIES 2000
RIGID TRUCK SHELTER

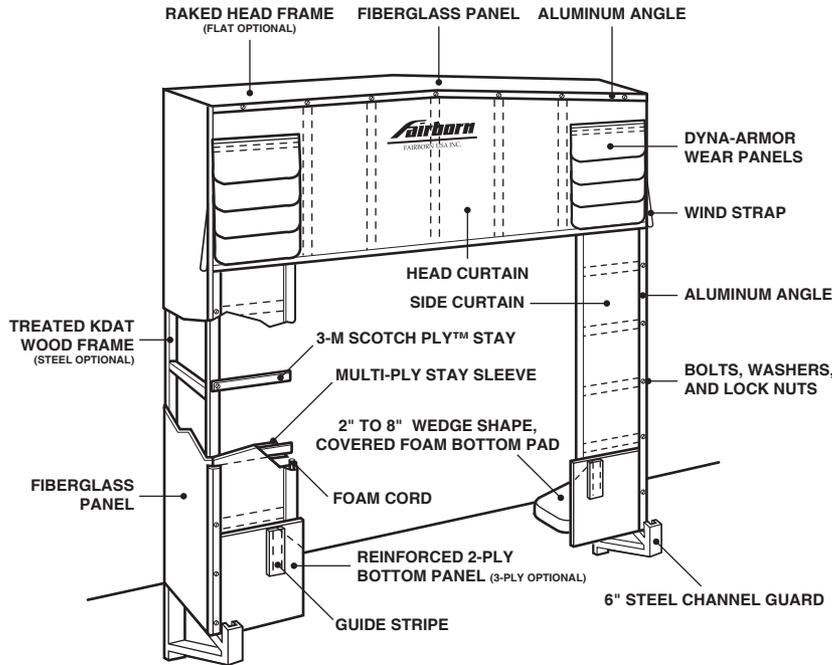

COMMON SIDE MEMBER

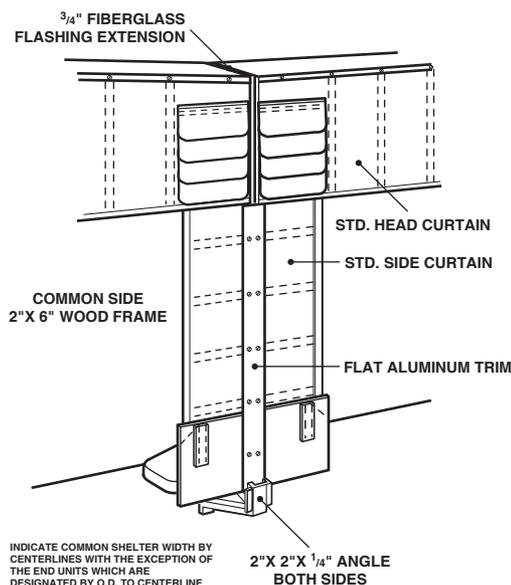

STEEL GUARD DATA

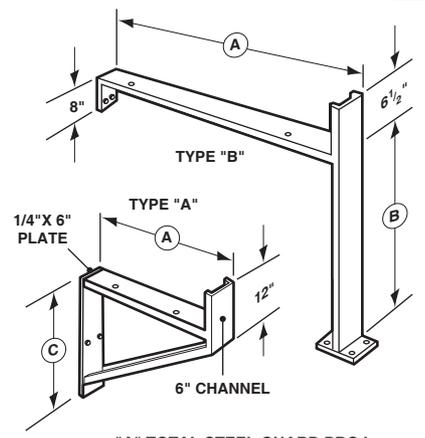

"A" TOTAL STEEL GUARD PROJ.
(STD. 6" GREATER THAN SIDE FRAME BOTTOM PROJECTION)

"B" DIM: MEASURE FROM DRIVE GRADE TO DOCK LEVEL @ "A" DIM. FROM BUILDING

"C" STEEL GUARD PROJ. "C" DIM.

24"-30"	20"
36"-42"	27"
48"-54"	34"

PLAN VIEW

TYPE

DOCK LEVEL

OVERHANG

FALSE HEADER

GROUND LEVEL (NOT SHOWN)

CANTILEVER DOCK (NOT SHOWN)

SET BACK WALL (NOT SHOWN)

FABRIC

DYNALON 1003

1001 1006

1002 1007

DIMENSIONS

"A" SHELTER WIDTH
(6" INCREMENTS)
(RECOMMENDED 11'-0" MIN. - 13'-0" MAX.)

"B" SHELTER HEIGHT
(6" INCREMENTS)
(RECOMMENDED 11'-0" MIN. - 15'-0" MAX. EXCEPT GROUND LEVEL TYPE)

"C" HEAD FRAME PROJ.

"D" SIDE FRAME TOP PROJ.

"E" SIDE FRAME BOTTOM PROJ.

"F" HEAD CURTAIN LENGTH

"G" LEFT SIDE CURTAIN WIDTH

"H" RIGHT SIDE CURTAIN WIDTH

"I" DOOR WIDTH

"J" DOOR HEIGHT

"K" DOCK HEIGHT

"L" DIM. TO OVERHANG

"M" DIM. TO FALSE HEADER
(STD. INSTALLED @ 150" ABOVE GRADE)

OPTIONAL EQUIPMENT

FULL "Z" (STAY PATTERN TOP OF SIDE CURTAIN)

3-PLY BOTTOM REINFORCEMENT (BOTTOM OF SIDE CURTAIN)

COMMON SIDE MEMBER

TUBULAR STEEL FRAME PAINTED GALVANIZED

FLAT HEAD FRAME 2X4 WOOD TUBULAR STEEL

ACCESS DOOR (LARGE PROJ. SIDE FRAMES, ONLY)

PULL ROPE (ROPE & PULLEYS TO RAISE HEAD CURTAIN)

BOTTOM FILLER PANEL (GROUND LEVEL UNITS ONLY)



P.O. BOX 151 • 205 BROADVIEW STREET
UPPER SANDUSKY, OHIO 43351
800-262-1188 • 419-294-4987 • FAX: 419-294-4980
VISIT US AT... WWW.FAIRBORNUSA.COM

JOB:

LOCATION:

CONTRACTOR: _____ **ARCHITECT:** _____

APPROVED BY SIGNATURE:

INDICATE COMMON SHELTER WIDTH BY CENTERLINES WITH THE EXCEPTION OF THE END UNITS WHICH ARE DESIGNATED BY O.D. TO CENTERLINE