

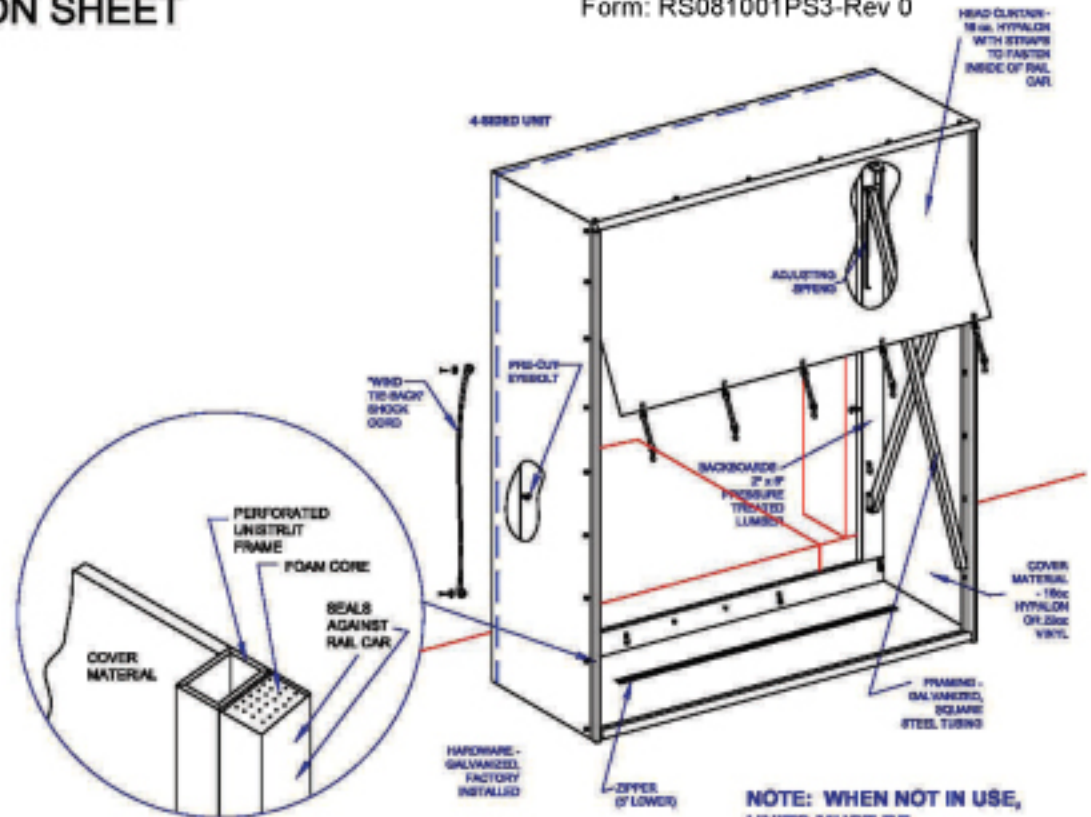


4-SIDED RAIL DOCK SHELTER SPECIFICATION SHEET

Form: RS081001PS3-Rev 0

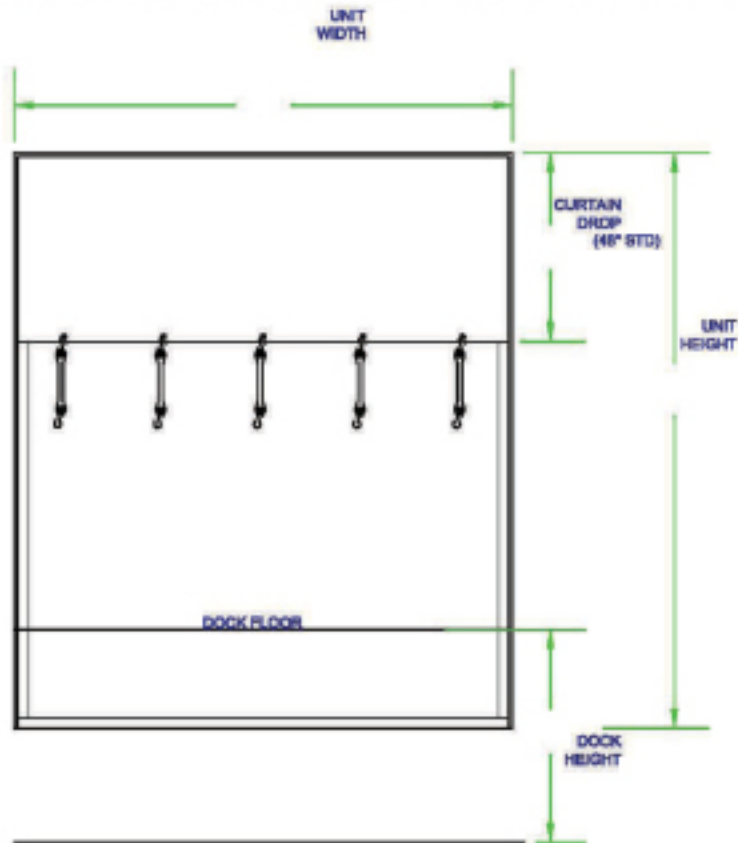

NOTE: WHEN NOT IN USE, UNITS MUST BE RETRACTED.

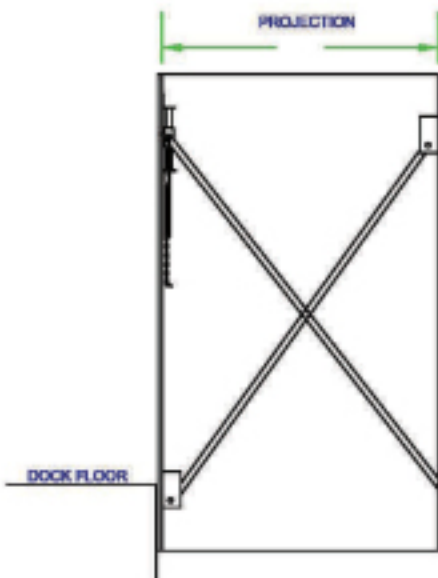

QUANTITY: _____, MODEL: _____ UNIT WIDTH: _____, HEIGHT: _____ PROJECTION: _____ HEAD CURTAIN OFF RAIL: _____ (Standard 11'-0" off rail) UNIT TO EXTEND BELOW DOCK: _____ NOTE: 4-sided Unit must extend a minimum of 12" below dock. It is also recommended, but not mandatory, to extend 3-sided unit 12" below dock to reduce bottom draft.	DOOR SIZE: _____ WIDTH, _____ HEIGHT DOCK HEIGHT: _____, BUMPER PROJECTION: _____ DISTANCE FROM WALL TO - CENTERLINE OF TRACKS: _____ INSIDE OF NEAR RAIL: _____ LEDGE or PLATFORM PRESENT: <input type="checkbox"/> YES <input type="checkbox"/> NO IF SO, DESCRIBE: _____ W x _____ H x _____ PROJECTION
<p align="center">SPECIAL INFORMATION</p>	P.O. BOX 1028 FRANKLIN, TN 37065-1028 PHONE: 800-394-5944; FAX: 615-371-1754 JOB: _____ DEALER: _____ CONTACT: _____ QUOTE #: _____ APPROVED BY SIGNATURE: _____

